


MANIFOLD 3

User Manual

v1.2 2025.08





This document is copyrighted by DJI with all rights reserved. Unless otherwise authorized by DJI, you are not eligible to use or allow others to use the document or any part of the document by reproducing, transferring or selling the document. Only refer to this document and the content thereof as instructions to operate DJI products. The document should not be used for other purposes.

In the event of divergence among different versions, the English version shall prevail.

Searching for Keywords

Search for keywords such as “battery” and “install” to find a topic. If you are using Adobe Acrobat Reader to read this document, press Ctrl+F on Windows or Command+F on Mac to begin a search.

Navigating to a Topic

View a complete list of topics in the table of contents. Click on a topic to navigate to that section.

Printing this Document

This document supports high resolution printing.

Using this Manual

Legend

 Important

 Hints and Tips

 Reference

Video Tutorials

Go to the address below or scan the QR code to watch the tutorial videos, which demonstrate how to use the product safely:



<https://enterprise.dji.com/manifold-3/video>

Download DJI Assistant 2

Download and install DJI ASSISTANT™ 2 (Enterprise Series) using the link below:

<https://www.dji.com/downloads/software/assistant-dji-2-for-matrice>


* Only supports the Windows version.

Contents

Using this Manual	2
Legend	2
Video Tutorials	2
Download DJI Assistant 2	3
1 Product Profile	5
1.1 Overview	5
1.2 Specifications	6
2 Installation	7
2.1 DJI Matrice 400	7
2.2 DJI Matrice 4 Series	8
2.3 DJI Matrice 4D Series	9
3 Usage	11
3.1 Firmware Update	11
3.2 Manifold Application	11
Install the Application	11
Run the Application	12
Export Application Files	13
3.3 Export Logs	13
Export Manifold 3 Logs	13
Export Application Logs	13

1 Product Profile

1.1 Overview

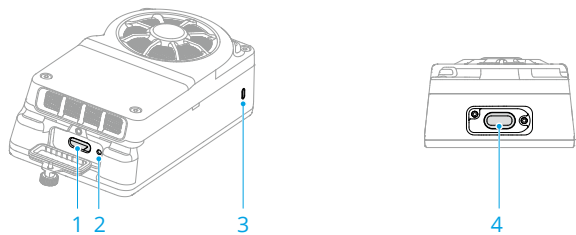

1. USB-C Port

It supports connecting USB 3.0 devices (such as docking stations and USB drives), but does not support connecting a computer directly.

- 
- Use USB PD chargers to power the device via this port, such as the DJI 100W USB-C Power Adapter or DJI 65W Portable Charger.
 - When the port is not in use, make sure to cover it and tighten the thumb screw.

2. Reset Button

Press and hold for 10 seconds to restore factory settings, which will erase installed applications and all data.

3. LED Indicator

	Solid green	Starting up
	Blinks green slowly	Working normally/Update Complete
	Blinks yellow slowly	System overheating, working at reduced frequency
	Blinks yellow quickly	Updating firmware
	Blinks red slowly	Update failed
	Blinks blue quickly	Restoring factory settings

4. E-Port

For connecting compatible aircraft only.

1.2 Specifications

Visit the following website for specifications.


<https://enterprise.dji.com/manifold-3/specs>

2 Installation


2.1 DJI Matrice 400

Tool List (sold separately)


Mounting Bracket



Coaxial Cable






Screws and Tools




Installing

Follow the diagram for installation and connection. The device can only connect to the aircraft's E1/E2/E3 ports. It is recommended to connect to the E3 port.

A



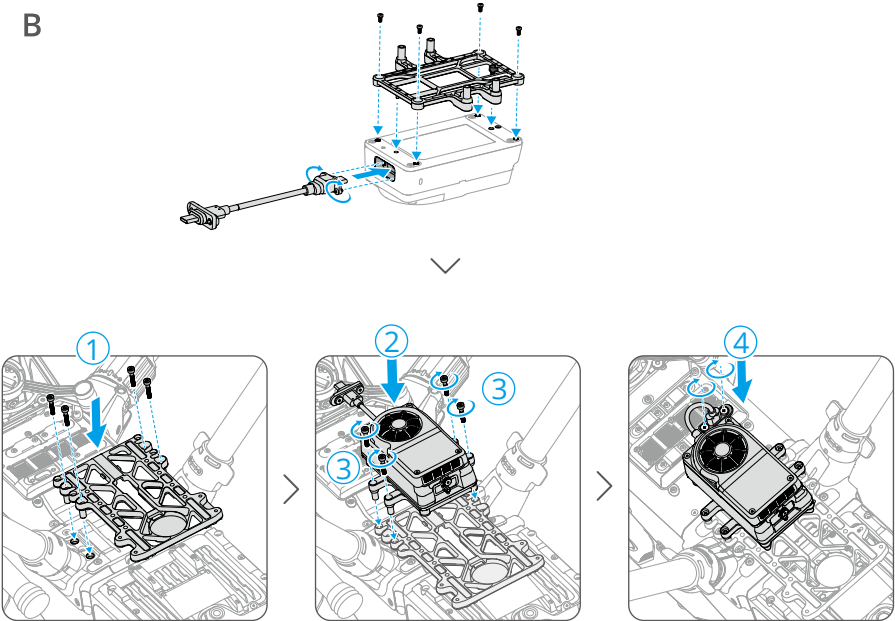


2.2 DJI Matrice 4 Series

Tool List (sold separately)

Mounting Bracket	Coaxial Cable	Screws and Tools

Installing


Follow the diagram for installation and connection.

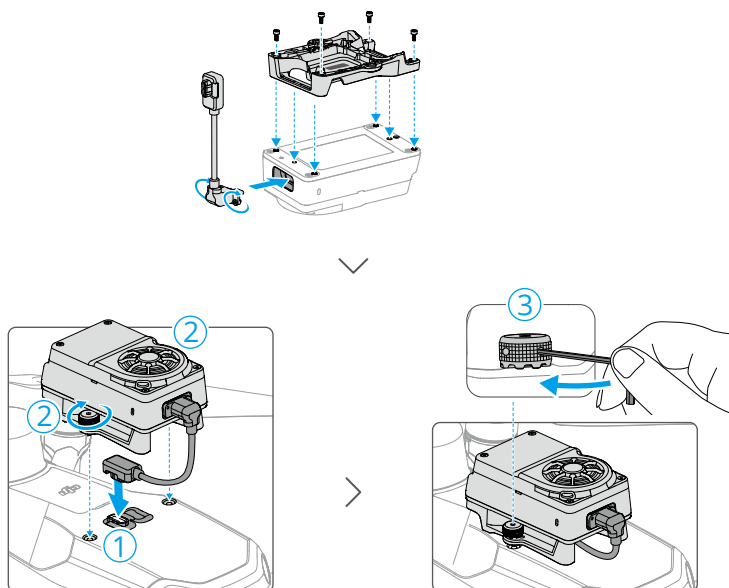

2.3 DJI Matrice 4D Series

Tool List (sold separately)


Mounting Bracket



Coaxial Cable




Screws and Tools



Installing

Follow the diagram for installation and connection.

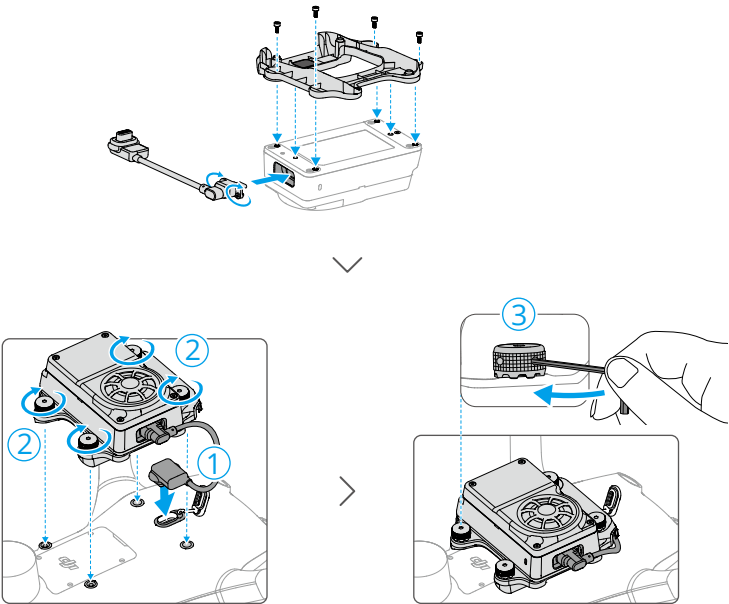

3 Usage

3.1 Firmware Update

1. Connect Manifold 3 to the aircraft, then connect the aircraft to a computer.
2. Make sure the computer is connected to the internet and the DJI device is powered on.
3. Launch DJI Assistant 2 and log in with a DJI account.
4. Select the device and click **Firmware Upgrade** on the left side.
5. Select the firmware version and click to update. The firmware will be downloaded and updated automatically.
6. A prompt appears when the update is successful.



- Users can also download the firmware package from the DJI official website for an offline update. Launch DJI Assistant 2 and click **Offline Update**. Select the device and the firmware package, then tap **Start Update**.
- The update will take a while. Wait patiently until it finishes.

3.2 Manifold Application

Developers can create Manifold 3 application based on DJI PSDK, and users can install and use the application via DJI Pilot 2. Visit <https://developer.dji.com/payload-sdk> for development information and guidelines.



- Visit <https://enterprise.dji.com/ecosystem> to search for and obtain application software that meets your requirements.

Install the Application


1. Copy the installation package with the .dpk extension to the remote controller's built-in storage or an external microSD card. Connect Manifold 3 to the aircraft, and power on the remote controller and aircraft. Ensure the remote controller is connected to the internet.
2. Launch DJI Pilot 2, and tap **Manifold 3 > Application Management**.
3. Tap the "+" in the upper right corner, and select the installation package file for installation. Successfully installed applications will be displayed on the **Application Management** page.

- To uninstall, enter **Application Management** page, then select the application and tap **More > Application Uninstallation**.
- To upgrade, follow the steps above to install the upgraded installation package.

Run the Application

Connect Manifold 3 to the aircraft. Launch DJI Pilot 2 and tap **Enter Camera View** on the home page.

- The interface may vary depending on the payload installed. Please refer to the actual interface.

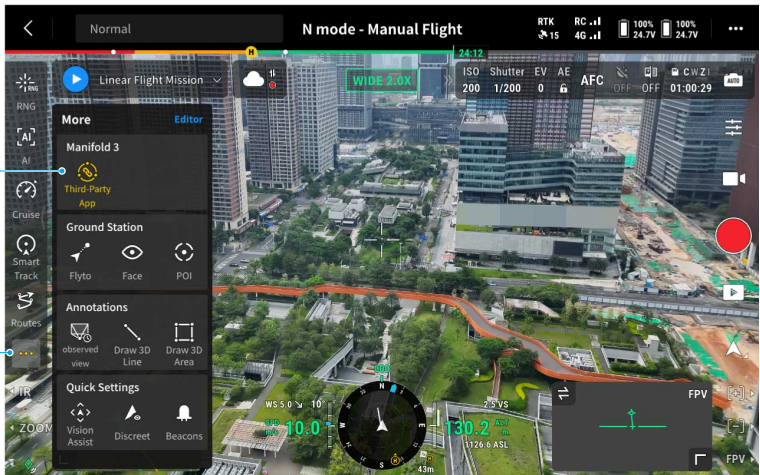

1. After entering the camera view, tap **...** on the left side to view the installed applications.
2. Tap the icon of the desired application to launch it. Users can view the operation effects in the camera view.

- Using multiple applications simultaneously is not supported. To switch to another application, tap the icon of the running application to close it first.
- Press and hold the application icon, then drag it to the function bar to pin it in the camera view for easy access.

Export Application Files

Using DJI Pilot 2

1. Connect Manifold 3 to the aircraft, then connect the USB drive or hard drive to Manifold 3's USB-C port.
2. Launch DJI Pilot 2 and enter **Application Management** page, then select the desired application and tap **File Export**. The data files will be saved to the USB drive or hard drive.

Using DJI Assistant 2

1. Connect Manifold 3 to the aircraft, then connect the aircraft to a computer.
2. Launch DJI Assistant 2, click **Log Export > Manifold 3 > Open Directory**, and select the data files to export.

3.3 Export Logs

Export Manifold 3 Logs

1. Connect Manifold 3 to the aircraft, then connect the aircraft to a computer.
2. Launch DJI Assistant 2 and log in with a DJI account.
3. Select the device and click **Log Export** on the left side.
4. Click the checkbox to select designated device logs.

Export Application Logs

1. Connect Manifold 3 to the aircraft, then connect the USB drive or hard drive to Manifold 3's USB-C Port.
2. Launch DJI Pilot 2 and enter **Application Management** page, then select the desired application and tap **More > Log Export**. The logs will be saved to the USB drive or hard drive.



When using DJI Assistant 2 to export logs, follow the steps in the [Export Application Files](#) section and select the log files to export.

WE ARE HERE FOR YOU



Contact
DJI SUPPORT

The content is subject to change without prior notice.
Download the latest version from



<https://enterprise.dji.com/manifold-3/downloads>

If you have any questions about this document, contact DJI by sending a message to
DocSupport@dji.com.

DJI and MANIFOLD are trademarks of DJI.
Copyright © 2025 DJI All Rights Reserved.